




TEMPERATURE CONTROLLERS... PORTABLE CHILLERS... CENTRAL CHILLERS... PUMP TANK STATIONS... TOWER SYSTEMS...

SUBJECT: 3 - 30 TON WATER COOLED BI-TEMP SCHEMATIC (TYPICAL)

#7-G-165

9/19/1995

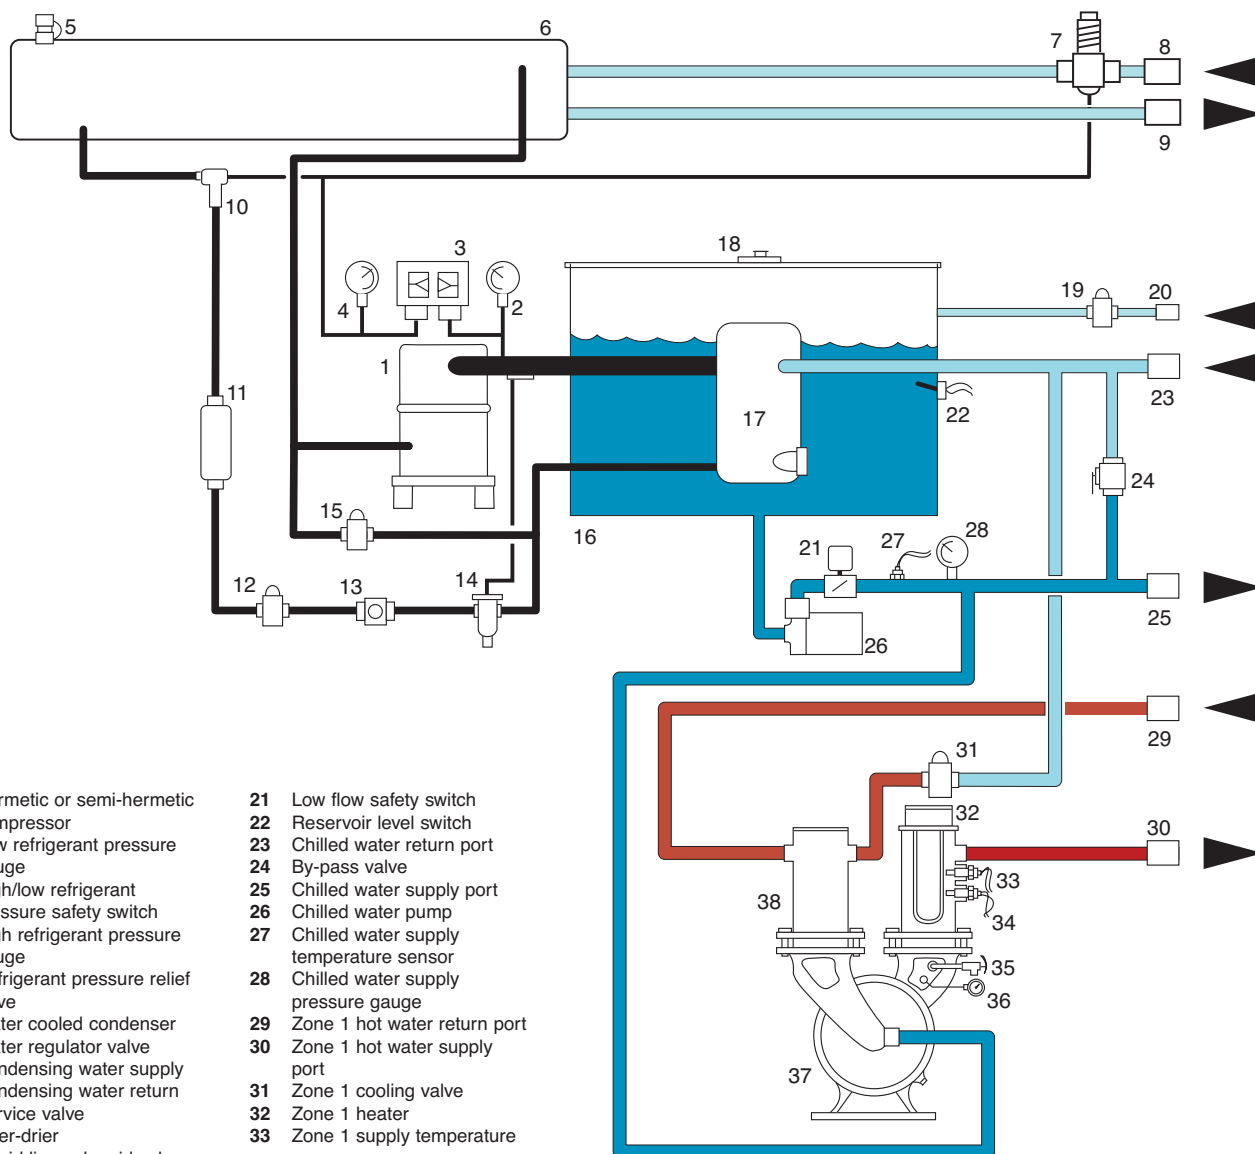

- | | |
|---|--|
| 1 Hermetic or semi-hermetic compressor | 21 Low flow safety switch |
| 2 Low refrigerant pressure gauge | 22 Reservoir level switch |
| 3 High/low refrigerant pressure safety switch | 23 Chilled water return port |
| 4 High refrigerant pressure gauge | 24 By-pass valve |
| 5 Refrigerant pressure relief valve | 25 Chilled water supply port |
| 6 Water cooled condenser | 26 Chilled water pump |
| 7 Water regulator valve | 27 Chilled water supply temperature sensor |
| 8 Condensing water supply | 28 Chilled water supply pressure gauge |
| 9 Condensing water return | 29 Zone 1 hot water return port |
| 10 Service valve | 30 Zone 1 hot water supply port |
| 11 Filter-drier | 31 Zone 1 cooling valve |
| 12 Liquid line solenoid valve | 32 Zone 1 heater |
| 13 Refrigerant sight glass | 33 Zone 1 supply temperature sensor |
| 14 Expansion valve | 34 Zone 1 high temperature safety switch |
| 15 Hot gas by-pass solenoid valve | 35 Zone 1 pressure relief valve |
| 16 Insulated reservoir tank | 36 Zone 1 supply pressure gauge |
| 17 Brazed plate evaporator | 37 Zone 1 hot water pump |
| 18 Manual fill port and tank lid | 38 Zone 1 suction tank |
| 19 Water make-up solenoid valve | 39 By-pass valve |
| 20 Water make-up connection | |